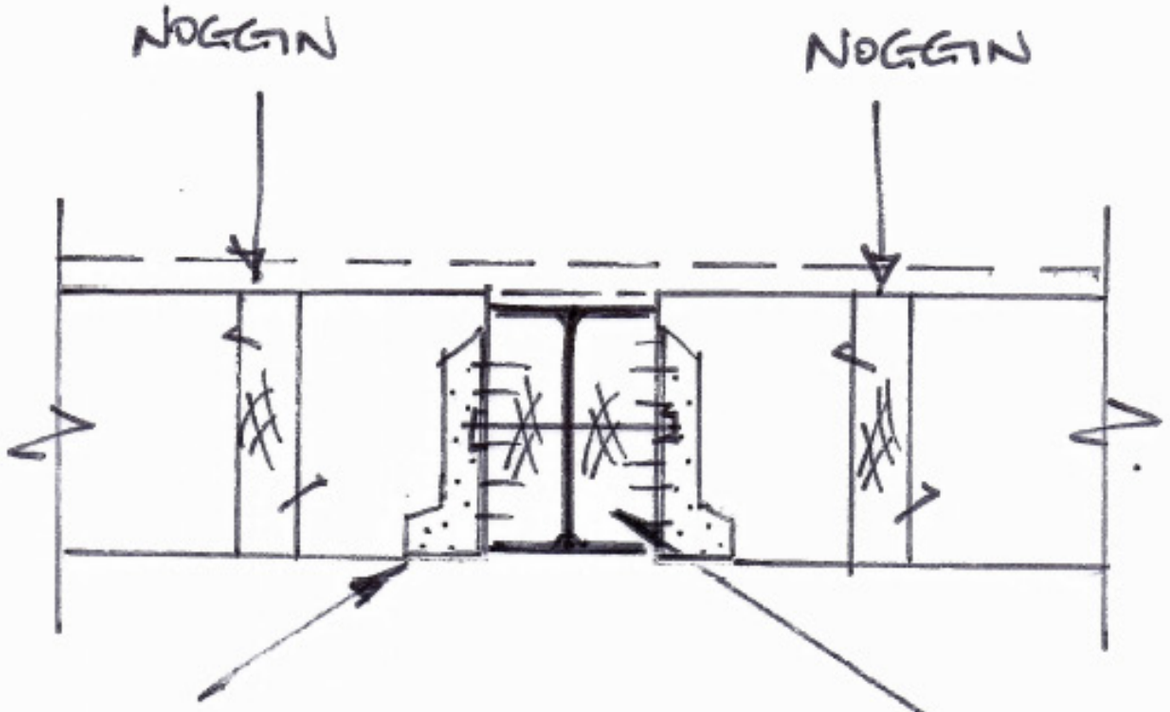

FIX JOISTS TO PACKING IN BEAM WITH SAE JOIST HANGERS BY SIMPSON STRONGTIE.

JOIST HANGERS ARE TO BE INSTALLED USING NAILS IN ALL NAIL HOLES PROVIDED IN HANGER IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS.

TIMBER PACK BETWEEN FLANGES of STEEL BEAM WITH C16 JOISTS. PACKING TO FIT TIGHT BETWEEN FLANGES TO ALLOW LOAD of JOISTS TO BE TRANSFERRED INTO BOTTOM FLANGE of BEAM.

BOLT PACKING INTO PLACE WITH M16 BOLTS (8.8) @ 400c/c.